


AR

FETAL MOVEMENT INSTRUMENT**Publication number:** JP11089832**Publication date:** 1999-04-06**Inventor:** SUMIMOTO KAZUHIRO; KIRIYUU TOORU;
MIYASHITA YOICHI; YAMASHITA MITSUGI;
MIYAHARA RYOKO**Applicant:** DAIKIN IND LTD**Classification:****- International:** A61B5/00; A61B7/04; A61B10/00; A61B5/00;
A61B7/00; A61B10/00; (IPC1-7): A61B7/04; A61B5/00;
A61B10/00**- European:****Application number:** JP19970256805 19970922**Priority number(s):** JP19970256805 19970922

Report a data error here

Abstract of JP11089832

PROBLEM TO BE SOLVED: To exactly detect the state of a fetus while facilitating acceptance for a pregnant woman and improving accuracy in the detection of fetal movement. **SOLUTION:** Noise removing processing is performed by supplying output signals from plural membrane piezoelectric sensors 1 to a 1st signal processing part 4, noise removed signals are supplied to a 2nd signal processing part 5, their levels are compared with a preset prescribed threshold value, a signal caused by the fetal movement is detected, this fetal movement signal is supplied to a fetal movement counting part 6 and counted, the measured number of fetal movement signals is supplied to a fetus state detecting part 7, and it is detected whether the fetus is healthy or dangerous.

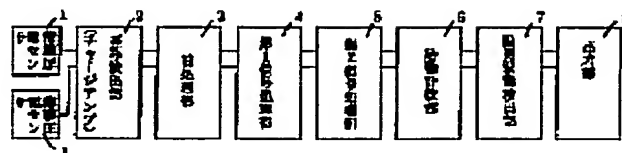

Data supplied from the esp@cenet database - Worldwide